

## JAST (Journal of Animal Science and Technology) TITLE PAGE

ARTICLE INFORMATION	Fill in information in each box below
<b>Article Type</b>	Research article
<b>Article Title (within 20 words without abbreviations)</b>	Relationship between Porcine Carcass Grades and Estimated Traits based on Conventional and Non-destructive Inspection Methods
<b>Running Title (within 10 words)</b>	Accuracy of non-destructive inspection method
<b>Author</b>	Seok-Won Lim <sup>1</sup> , Doyon Hwang <sup>2</sup> , Sangwook Kim <sup>1</sup> , and Jun-Mo Kim <sup>1</sup>
<b>Affiliation</b>	1 Functional Genomics & Bioinformatics Laboratory, Department of Animal Science and Technology, Chung-Ang University, Anseong, Gyeonggi-do 17546, Republic of Korea  2 Korea Institute for Animal Products Quality Evaluation, Sejong 30100, Republic of Korea
<b>ORCID (for more information, please visit <a href="https://orcid.org">https://orcid.org</a>)</b>	Seok-Won Lim: 0000-0002-3557-785X Doyon Hwang: 0000-0003-2845-5093 Sangwook Kim: 0000-0003-1848-2434 Jun-Mo Kim: 0000-0002-6934-398X
<b>Competing interests</b>	No potential conflict of interest relevant to this article was reported
<b>Funding sources</b> State funding sources (grants, funding sources, equipment, and supplies). Include name and number of grant if available.	This work was carried out with the support of the Cooperative Research Program for Agriculture Science & Technology Development, of the Rural Development Administration, Republic of Korea (PJ016227012021).
<b>Acknowledgements</b>	This research was supported by the Chung-Ang University Graduated Research Scholarship in 2020.
<b>Availability of data and material</b>	
<b>Authors' contributions</b> Please specify the authors' role using this form.	Conceptualization: Seok-Won Lim and Jun-Mo Kim. Data curation: Jun-Mo Kim. Formal analysis: Seok-Won Lim and Sangwook Kim. Methodology: Seok-Won Lim. Software: Seok-Won Lim. Investigation: Doyon Hwang. Writing - original draft: Seok-Won Lim. Writing - review & editing: Jun-Mo Kim and Sangwook Kim.
<b>Ethics approval and consent to participate</b>	This article does not require IRB/IACUC approval because there are no human and animal experiments.

### CORRESPONDING AUTHOR CONTACT INFORMATION

For the corresponding author (responsible for correspondence, proofreading, and reprints)	Fill in information in each box below
First name, middle initial, last name	Jun-Mo Kim
Email address – this is where your proofs will be sent	junmokim@cau.ac.kr
Secondary Email address	
Address	Functional Genomics & Bioinformatics Laboratory, Department of Animal Science and Technology, Chung-Ang University, Anseong, Gyeonggi-do 17546, Republic of Korea

Cell phone number	+82-10-4026-5644
Office phone number	+82-31-670-3263
Fax number	+82-31-675-3108

ACCEPTED

## Abstract

As pork consumption increases, rapid and accurate determination of porcine carcass grades at abattoirs has become important. Non-destructive, automated inspection methods have improved slaughter efficiency in abattoirs. Furthermore, the development of a calibration equation suitable for non-destructive inspection of domestic pig breeds may lead to rapid determination of pig carcass and more objective pork grading judgement. In order to increase the efficiency of pig slaughter, the correct estimation of the automated-method that can accommodate the existing pig carcass judgement should be made. In this study, the previously developed calibration equation was verified to confirm whether the estimated traits accord with the actual measured traits of pig carcass. A total of 1,069,019 pigs, to which the developed calibration equation, was applied were used in the study and the optimal estimated regression equation for actual measured two traits (backfat thickness and hot carcass weight) was proposed using the estimated traits. The accuracy of backfat thickness and hot carcass weight traits in the estimated regression models through stepwise regression analysis was 0.840 ( $R^2$ ) and 0.980 ( $R^2$ ), respectively. By comparing the actually measured traits with the estimated traits, we proposed optimal estimated regression equation for the two measured traits, which we expect will be a cornerstone for the Korean porcine carcass grading system.

**Keywords:** Porcine carcass, Backfat thickness, Carcass weight, Meat grading, Non-destructive inspection method

## Introduction

Pork is the most consumed meat in the world, and has long established its position as a staple food on the market [1]. Consumption of pork is growing rapidly and steadily in the Asian market [2]. To accommodate this growth, the Animal Products Grading Service (APGS) has been established in South Korea, resulting in changes in the livestock product industry. The introduction of the APGS has led to reliable meat distribution and reasonable prices between consumers and suppliers, providing various options of meat cuts and quality [3]. Pork grade information allows consumers to purchase pork at a desired price and increases the production of high-grade pork due to the preference of higher grades [4]. Thus, for the production and consumption of high-quality pork, the accuracy of pig carcass grading service has become important.

As pork consumption increases, the number of abattoirs slaughtering more than 300 pigs per hour rises owing to modernisation and scale-up of slaughter facilities [5]. The increased rate of slaughter in abattoirs has raised the need for rapid and accurate judgement of pig carcasses. Efforts to improve pig carcass judgement have been conducted worldwide through the use of devices that can estimate the lean meat percentage (LMP) of pig carcasses, such as Fat-O-Meat'er (FOM), UltraFOM (UFOM), AutoFOM, and Vision-Based Video Image Analyzer (VCS2000) [6-9]. Accordingly, in Korea, non-destructive automated inspection methods, such as the AutoFOM and VCS2000 systems, have been implemented to improve slaughter efficiency in abattoirs. AutoFOM uses the reflectance of ultrasound to automatically measure LMP and fat thickness [10]. VCS2000 system is an image processing-based method that automatically detects the LMP of half carcasses, capable of measuring pig carcass at an average speed of more than 600 heads per hour [11]. Both non-destructive automated inspection methods for predicting the LMP of a pig carcass passed European standards, but the AutoFOM method showed a lower error rate [12]. Nevertheless, the VCS2000 image processing-based system can automatically detect the LMP of half pig carcasses at high speed [13]. For the efficient calculation of LMP using the VCS2000 system, a calibration equation must be developed from the carcass image parameters. However, because the calibration equation is influenced by the breed and genetic difference of pigs, the existing European equation is not effective for use in Korea [8]. For the effective calculation of LMP utilising the VCS2000 system, a calibration equation for Korean pig breeds is required. Therefore, a calibration equation was developed to the estimation of LMP in Korean whole pig carcasses and lean meat yield of their primal cuts, which is expected to improve the speed, accuracy, and objectiveness of pig carcass judgement [14].

An automated, LMP-based system for pig carcass has been applied in some abattoirs to improve the efficiency of pig slaughter and to obtain objective grading parameters [5]. Domestic pig carcass grading is determined by carcass quality and meat quality, including 21 parameters: backfat thickness (BFT), hot carcass weight (CWT), sex, appearance, meat quality, and defects [15]. Non-destructive method estimated lean meat yield of pig carcass including BFT and CWT, as well as allow for more objective pork grading than conventional manual judgement. Therefore, in order to increase the efficiency of pig slaughter through the non-destructive method, the correct estimation of the automated method that can accommodate the existing pig carcass judgement should be made.

In the present study, we aimed to identify whether the estimated traits accord with the actual measured traits through verifying the previously developed calibration equation. The accuracy of the developed calibration equation based on the relationship between the measured traits (BFT and CWT) and the estimated traits was evaluated considering the effects of sex, abattoir, and season that affect actual slaughter. Furthermore, the optimal estimated regression equation for the measured BFT and CWT traits was formulated. Through this, it is possible to reconsider the efficiency in actual abattoirs, and it is expected that can be used as a parameters for more objective grading judgement.

## Materials and Methods

### Animals

A total of 1,069,019 Landrace × Yorkshire × Duroc (LYD) pigs (524,001 females, 6,444 males, and 538,574 castrated males) slaughtered between January and December 2019 were assessed in this study. All the pigs were slaughtered at three abattoirs following standard procedures under the supervision of the Korean Grading Service for Animal Products. BFT and CWT were measured immediately after slaughter. BFT was measured with ruler at the 11th/12th thoracic vertebrae and the 14th thoracic vertebra/1st lumbar vertebra on the left half of each carcass, and the average of two measurements was used for analysis.

### Traits estimated using non-destructive method

The traits of pig carcasses were estimated to non-destructive automated inspection method using the VCS2000 system (E+V Tehchnology GmbH & Co.KG, Oranienburg, Germany). VCS2000 non-destructive method calculates the LMP in half carcass through video image systems [7]. However, because the variables measured by VCS2000 is influenced by the breed and genetic difference of pigs, efficient LMP prediction requires a calibrated equation [8]. Therefore, the traits of pig carcasses were estimated by applying the calibration equation developed for estimating the LMP and lean meat yield of Korean pig carcasses [14]. A total of 46 traits of main cuts were estimated using the non-destructive inspection method, and the estimated traits were then divided into five categories: 5 BFT-related traits (BFT, BFT in the 11th/12th thoracic vertebrae [BFT11/12], BFT in the 14th thoracic vertebra/1st lumbar vertebra [BFT14/1], BFT in the 7th multifidus muscle, and BFT in the 1st/2th thoracic vertebrae), 21 major cut-related traits (rib weight, rib trim weight, rib meat weight, neck weight, neck trim weight, neck meat weight, shoulder weight [SWT], shoulder trim weight, shoulder meat weight, tenderloin weight, tenderloin trim weight, tenderloin meat weight, belly weight, belly trim weight, belly meat weight, loin weight [LWT], loin trim weight, loin meat weight, ham weight, ham trim weight, and ham meat weight), 5 pork belly-related traits (belly fat weight, belly rate, belly trim rate, 10-cm neck fat thickness, and intra-fat thickness), 10 traits related to other parts (CWT, front weight [FWT], middle weight [MWT], rear weight, foreshank weight, front meat weight, diaphragm weight, middle meat weight, hindshank weight, and rear meat weight), and 5 total traits (total skin weight, total fat weight, total bone weight [TBWT], total meat weight, and LMP).

### Statistical analysis

The SAS 9.4 statistical software package (SAS Institute Inc., Cary, North Carolina, USA) was used to calculate the mean, standard deviation, and range of the measured (BFT and CWT) and estimated traits of pig carcasses. Pearson correlation coefficients [16] were used to assess the relationship between two measured traits (BFT and CWT) and 46 estimated traits.

Analysis of variance [17] was performed using the general linear model in SAS to simultaneously consider three fixed effects (abattoir, sex, and season) in the optimal estimated regression equation. The fixed effects comprised 3 abattoirs (abattoir A, B, and C), 3 sexes (females, males, and castrated males), and 2 seasons (summer and non-summer). Seasons were divided into summer (June, July, and August) and non-summer to consider the relationship between the high temperature in summer and productivity [18]. Differences in the measured traits (BFT and CWT) according to each fixed effect were analysed using *t*-tests [19], which was used to compare means between groups and to determine whether the differences in means were statistically significant [20].

The 46 estimated traits for the two measured traits (BFT and CWT) were further subjected to stepwise regression analysis [21] using the REG procedure in SAS. The inclusion or exclusion of significant traits was set to a common level ( $p < 0.001$ ). The model was  $y = \beta_0 + X_b + \beta_n X_b + \epsilon$ , where  $y$  is the measured trait;  $\beta_0$  is the general intercept; in  $X_b$ ,  $X$  is the design matrix of a fixed effect and  $b$  is the fixed effect (abattoir, sex, and season); in  $\beta_n X_b$ ,  $\beta_n$  is the estimated regression coefficient for each estimated trait;  $X_b$  is the estimated trait; and  $\epsilon$  is the model error. For each dependent variable, the top three estimated traits that could sufficiently describe the model by considering the coefficient of determination ( $R^2$ ) were used in the final estimated regression model. Each of the top three estimated traits, which could better explain the relationship between the estimated traits for measured BFT and CWT, was used in the simple linear regression model. The accuracy of the estimated regression model was represented by  $R^2$  and residual standard deviation. The scatter plots with four pork grades were added to the simple regression model for measured BFT and CWT traits, which are parameters used for pork grading judgement.

## Results

### Measured and estimated traits of porcine carcasses

Basic statistical analysis results for the two measured traits (BFT and CWT) and 46 estimated traits are presented in Table 1. The mean, standard deviation, minimum values, and maximum values of the measured and estimated traits were calculated for each abattoir. Analysis of variance demonstrated a significant difference ( $p < 0.001$ ) in the two measured traits between the three fixed effects (Supplementary table 1). The quartile range of each fixed effect on the measured trait was visualised in a boxplot (Figure 1). All three fixed effects showed a significant difference ( $p < 0.001$ ) in both measured traits. The mean values of measured BFT according to each fixed effect was calculated (abattoir A = 23.282, abattoir B = 22.844, abattoir C = 22.602; female = 21.534, male = 18.238, castrated male = 24.386; summer = 23.342, and non-summer = 22.822). Likewise, the mean values of measured CWT were calculated according to each fixed effect (abattoir A = 90.195, abattoir B = 86.777, abattoir C = 88.419; female = 88.374, male = 86.621, castrated male = 88.536; summer = 87.374, and non-summer = 88.797).

### Correlations between measured and estimated traits

The correlations between the two measured traits (BFT and CWT) and 46 estimated traits were visualised as a heat map (Figure 2). The results of correlation analysis established a close relationship between the estimated traits and measured BFT trait in all three abattoirs: estimated BFT (abattoir A,  $R = 0.906$ ; abattoir B,  $R = 0.900$ ; and abattoir C,  $R = 0.941$ ), estimated BFT14/1 (abattoir A,  $R = 0.873$ ; abattoir B,  $R = 0.855$ ; and abattoir C,  $R = 0.901$ ), and estimated BFT11/12 (abattoir A,  $R = 0.852$ ; abattoir B,  $R = 0.805$ ; and abattoir C,  $R = 0.878$ ). Moreover, correlation analysis verified a close relationship between the estimated traits and measured CWT trait in all three abattoirs: estimated SWT (abattoir A,  $R = 0.944$ ; abattoir B,  $R = 0.949$ ; and abattoir C,  $R = 0.938$ ), estimated FWT (abattoir A,  $R = 0.936$ ; abattoir B,  $R = 0.942$ ; and abattoir C,  $R = 0.943$ ), and estimated MWT (abattoir A,  $R = 0.936$ ; abattoir B,  $R = 0.941$ ; and abattoir C,  $R = 0.933$ ). The measured traits and estimated traits showed significant correlation in all three abattoirs ( $p < 0.001$ ), except for correlation between measured BFT trait and estimated diaphragm weight trait at abattoir C ( $p = 0.737$ , Supplementary table 2).

### Estimated regression models

Stepwise regression analysis was performed using measured traits (BFT and CWT) as dependent variables (Supplementary table 3 and 4). Through partial and model  $R^2$  in the entire estimated regression models ( $R^2 = 0.840$ ),



the top three estimated traits (BFT, LWT, and TBWT) could sufficiently predict the measured BFT trait. Likewise, it was demonstrated that the top three estimated traits (SWT, LWT, and FWT) could predict measured CWT traits in the overall estimated regression models ( $R^2 = 0.980$ ). The estimated regression models for measured BFT (1) and CWT (2) traits with three fixed effects were as follows (Table 2):

$$y = 1.298(\beta_0) + 0.781(\text{BFT}) + 0.829(\text{LWT}) - 0.970(\text{TBWT}) + 0.033(\epsilon), (R^2 = 0.840) - (1)$$

$$y = 6.185(\beta_0) + 2.419(\text{SWT}) + 2.759(\text{LWT}) + 1.003(\text{FWT}) + 0.013(\epsilon), (R^2 = 0.980) - (2)$$

To better elucidate the relationship between the measured and estimated traits, a simple linear regression model describing each of the top three estimated traits was generated and visualised as a dot plot, as shown in Figure 3. The accuracy of the model for measured BFT trait was determined using simple linear regression analysis (BFT,  $R^2 = 0.8301$ ; LWT,  $R^2 = 0.3597$ ; TBWT,  $R^2 = 0.0686$ ). The model was also evaluated for accuracy in measured CWT trait using simple linear regression analysis (SWT,  $R^2 = 0.8978$ ; LWT,  $R^2 = 0.8178$ ; and FWT,  $R^2 = 0.8741$ ). As shown in Figure 3, the four pork grades were marked with different colours, and it was confirmed that the higher grades were distributed in the centre.

## Discussion

The introduction of an automated-system increase the efficiency of pig slaughter and allow for more objective pork grading rather than conventional manual judgement. In order to increase the efficiency of the pig carcass automated-system, an accurate estimation of the automated-method that can accommodate the existing pig carcass judgement is required. Therefore, the current study verified previously developed calibration equation [14]. The models were based on the relationship between the 46 estimated traits using a non-destructive method and the actual two measured traits (BFT and CWT). We established, using correlation analysis, that measured BFT trait had a high correlation with estimated BFT-related traits (BFT, BFT11/12, and BFT14/1). Actually measured BFT trait was calculated as the average of measured BFT11/12 and BFT14/1 [15], and these two BFT-related traits have been shown as high estimated traits for measured BFT trait. This showed that a model to which a developed calibration equation was applied could high predict the measured BFT trait [14]. Measured CWT trait showed a higher correlation with weight-related estimated traits including SWT, FWT, and MWT traits than CWT trait (Supplementary table 2). The calibration equation for the application of non-destructive inspection method was calculated using a relatively low number of animals (175 pigs) [14]. It seems that the CWT trait was not sufficiently estimated owing to the small sample size used in the previously developed equation. The measured BFT trait showed a high correlation with BFT-related estimated traits and our findings indicated that estimated traits are sufficiently predict of measured CWT trait, even though estimated traits are non-CWT-related traits.

Stepwise regression analysis was conducted to establish an optimal estimated regression model that could predict measured traits from estimated traits [22]. Unlike in the correlation analysis, fixed effects (abattoir, sex, and season) that may affect measurement during the actual slaughtering process were applied in the regression analysis [23]. It was established that the estimated regression models, which used measured BFT and CWT traits as dependent variables, could be sufficiently explained by 3 out of 46 estimated traits. The accuracy of measured BFT and CWT traits by the estimated regression model was 0.840 ( $R^2$ ) and 0.980 ( $R^2$ ), respectively. Through a simple linear regression model, the accuracy of each estimated trait for the measured traits (BFT and CWT) was confirmed. All of the estimated traits (SWT, LWT, and FWT) for the measured CWT trait showed relatively high accuracy, but in the measured BFT trait, except for the estimated BFT trait, estimated traits (LWT and TBWT) showed low accuracy. In the estimated regression model for measured BFT trait, estimated LWT and TBWT traits had lower partial  $R^2$  and did not present a significant difference in accuracy compared to the model with one estimated BFT trait. Whereas, for

measured CWT trait, the model accuracy increased when estimated traits were included in the estimated regression model. Among the top three estimated traits used for measured CWT trait, estimated SWT and FWT traits had high  $R$ , even in correlation analysis. The estimated LWT trait, which was one of the top three estimated traits, was a common trait between the two measured traits. According to a previous report, loin content showed a close inverse relationship with BFT and lean meat content [24]. This finding on the effect of BFT and meat content on loin content ratio in carcasses showed that estimated LWT trait was closely related to both measured traits.

In order to increase the efficiency of pig slaughter and to obtain objective pig carcasses, an automated pork grading system based on LMP has been applied in some abattoirs. As accurate estimation of an automated-method that can accommodate the existing pig carcass judgement is required, the developed calibration equation that applied to the non-destructive automated inspection method was verified. The accuracy of the developed calibration equation was evaluated based on the relationship between the two measured traits (BFT and CWT) and the 46 estimated trait, and an optimal estimated regression equation for the two measured traits was formulated. Taken together, our findings suggest that estimated BFT-related traits can be used to predict actual BFT trait, and even use estimated traits that are non-CWT-related can sufficiently predict actual CWT trait.

In conclusion, the proposed optimal estimated regression equation is expected to improve the accuracy of pork grading in abattoirs through objective judgment. The developed estimated regression models can be widely implemented in other domestic abattoirs to improve pig carcass grading judgement system. We expect that this accurate prediction method using our estimated regression models will be a cornerstone for the Korean pig carcass grading system. Through this, it is possible to reconsider the efficiency in actual abattoirs, and it is expected that can be used as a parameters for more objective grading judgement. Furthermore, additional study is needed to increase the utilization of the other primal cuts.

210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228

## **Competing interests**

No potential conflict of interest relevant to this article was reported.

## **Acknowledgements**

This research was supported by the Chung-Ang University Graduated Research Scholarship in 2020.

## **Author's Contributions**

Conceptualization: Seok-Won Lim and Jun-Mo Kim.  
Data curation: Jun-Mo Kim.  
Formal analysis: Seok-Won Lim and Sangwook Kim.  
Methodology: Seok-Won Lim.  
Software: Seok-Won Lim.  
Investigation: Doyon Hwang.  
Writing - original draft: Seok-Won Lim.  
Writing - review & editing: Jun-Mo Kim and Sangwook Kim.

## **Ethics approval and consent to participate**

This article does not require IRB/IACUC approval because there are no human and animal experiments.


- 230 1. Szymańska EJ. The development of the pork market in the world in terms of globalization.  
231 Journal of Agribusiness Rural Development. 2017;46(4):843–50–50.
- 232 2. Oh S-H, Whitley NC. Pork Production in China, Japan and South Korea. Asian-Australasian  
233 journal of animal sciences. 2011;24(11):1629-36.
- 234 3. Hwang D-Y. Pork industry and the Animal Products Grading Service (APGS). KAPE  
235 Magazine. 2005:4-7.
- 236 4. Tonsor GT, Schroeder TC. Economic needs assessment: Pork quality grading system. Report  
237 prepared for the National Pork Board Available at Web site [http://www.wagmanager](http://www.wagmanager.info/sites/default/files/pdf/EconomicNeedsAssessmentOfPorkQualityGradingSystem.pdf)  
238 info/sites/default/files/pdf/EconomicNeedsAssessmentOfPorkQualityGradingSystem pdf.  
239 2013.
- 240 5. Kim GT, Kang SJ, Yoon YG, Kim HS, Lee WY, Yoon SH. Introduction of automatic grading  
241 and classification machine and operation status in Korea. Korean society for food science of  
242 animal resources. 2017;6(1):34-45.
- 243 6. Brøndum J, Egebo M, Agerskov C, Busk H. On-line pork carcass grading with the Autofom  
244 ultrasound system. Journal of Animal Science. 1998;76(7):1859-68.
- 245 7. Daumas G, Causeur D. Tests d'homologation des appareils automatiques de classement des  
246 carcasses de porc. Journées Rech Porcine. 2008;40:91-2.
- 247 8. Furnols MF, Engel B, Martinell MG. Validation of the Spanish equation to predict the lean  
248 meat percentage of pig carcasses with the Fat-O-Meat'er. Spanish journal of agricultural  
249 research. 2004(4):545-9.
- 250 9. Johnson RK, Berg E, Goodwin R, Mabry J, Miller R, Robison O, et al. Evaluation of  
251 procedures to predict fat-free lean in swine carcasses. Journal of animal science.  
252 2004;82(8):2428-41.
- 253 10. Olsen EV, Candek-Potokar M, Oksama M, Kien S, Lisiak D, Busk H. On-line measurements  
254 in pig carcass classification: Repeatability and variation caused by the operator and the copy  
255 of instrument. Meat science. 2007;75(1):29-38.
- 256 11. Pomar C, Marcoux M, Gispert M, i Furnols MF, Daumas G. Determining the lean content of  
257 pork carcasses. Improving the sensory  
258 nutritional quality of fresh meat Woodhead Publishing, Cambridge, UK. 2009:493-518.

- 259 12. i Furnols MF, Gispert M. Comparison of different devices for predicting the lean meat  
260 percentage of pig carcasses. *Meat science*. 2009;83(3):443-6.
- 261 13. Choi JS, Kwon KM, Lee YK, Joeng JU, Lee KO, Jin SK, et al. Application of AutoFom III  
262 equipment for prediction of primal and commercial cut weight of Korean pig carcasses.  
263 *Asian-Australasian journal of animal sciences*. 2018;31(10):1670.
- 264 14. Lohumi S, Wakholi C, Baek JH, Do Kim B, Kang SJ, Kim HS, et al. Nondestructive  
265 estimation of lean meat yield of South Korean pig carcasses using machine vision technique.  
266 *Korean journal for food science of animal resources*. 2018;38(5):1109.
- 267 15. Detailed standards for grading livestock products, Stat. 462 (2020. 12. 29, 2020).
- 268 16. Pearson ES. The test of significance for the correlation coefficient. *Journal of the American*  
269 *Statistical Association*. 1931;26(174):128-34.
- 270 17. Girden ER. ANOVA: Repeated measures: Sage; 1992.
- 271 18. Lee S, Oh T, Kim S, Min W, Gutierrez W-M, Chang H, et al. Effects of environmental factors  
272 on death rate of pigs in South Korea. *Journal of the Faculty of Agriculture, Kyushu University*.  
273 2012;57(1):155-60.
- 274 19. Kim TK. T test as a parametric statistic. *Korean journal of anesthesiology*. 2015;68(6):540.
- 275 20. Student. The probable error of a mean. *Biometrika*. 1908:1-25.
- 276 21. Bendel RB, Afifi AA. Comparison of stopping rules in forward “stepwise” regression. *Journal*  
277 *of the American Statistical association*. 1977;72(357):46-53.
- 278 22. Steyerberg EW, Eijkemans MJ, Habbema JDF. Stepwise selection in small data sets: a  
279 simulation study of bias in logistic regression analysis. *Journal of clinical epidemiology*.  
280 1999;52(10):935-42.
- 281 23. Edwards LJ, Muller KE, Wolfinger RD, Qaqish BF, Schabenberger O. An R<sup>2</sup> statistic for  
282 fixed effects in the linear mixed model. *Statistics in medicine*. 2008;27(29):6137-57.
- 283 24. Knecht D, Duziński K. The effect of sex, carcass mass, back fat thickness and lean meat  
284 content on pork ham and loin characteristics. *Archives Animal Breeding*. 2016;59(1):51-7.

286

Figure and table legends

287

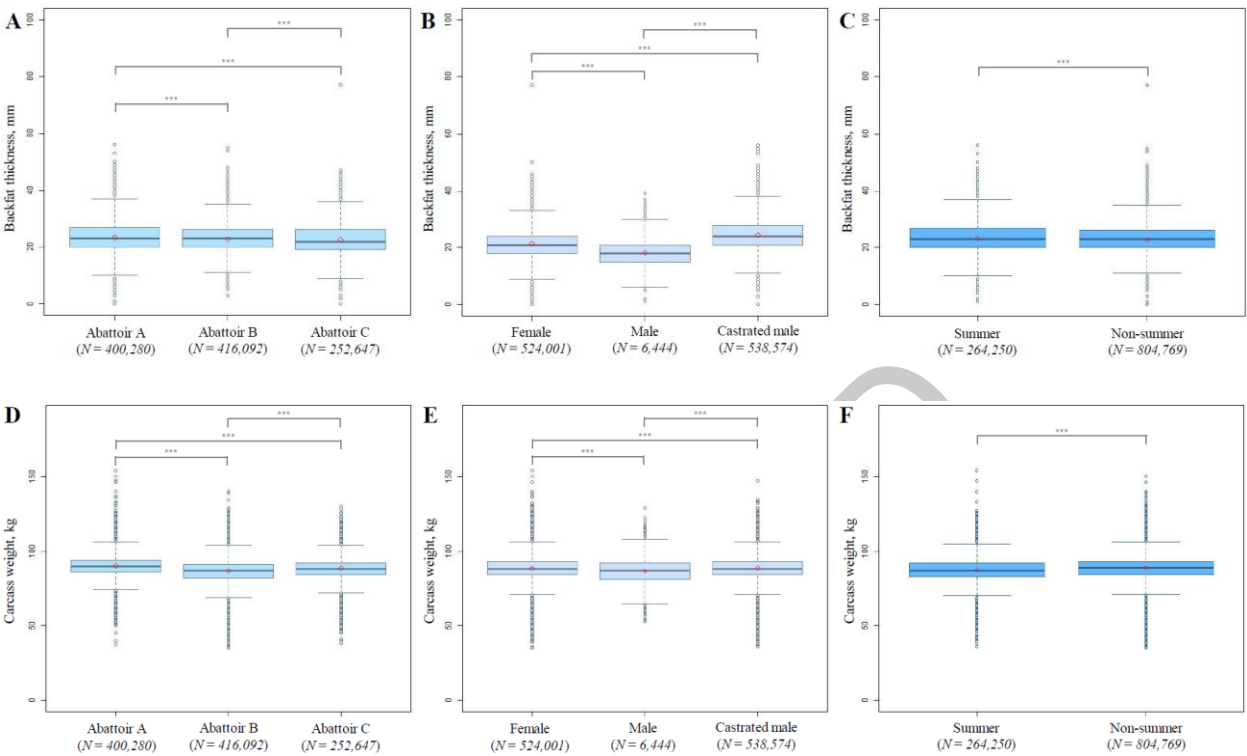

289

290


291

292

293


294

**Fig. 1. Boxplots showing that differences in measured two traits (backfat thickness and carcass weight) according to each fixed effect. T-test, \*\*\* $p < 0.001$ . A, B, and C represent the effects of abattoir, sex, and season on backfat thickness, respectively. D, E, and F represent the effects of abattoir, sex, and season effects for carcass weight, respectively. The horizontal line in the box represents the median, and the red rhombus indicates the mean.**

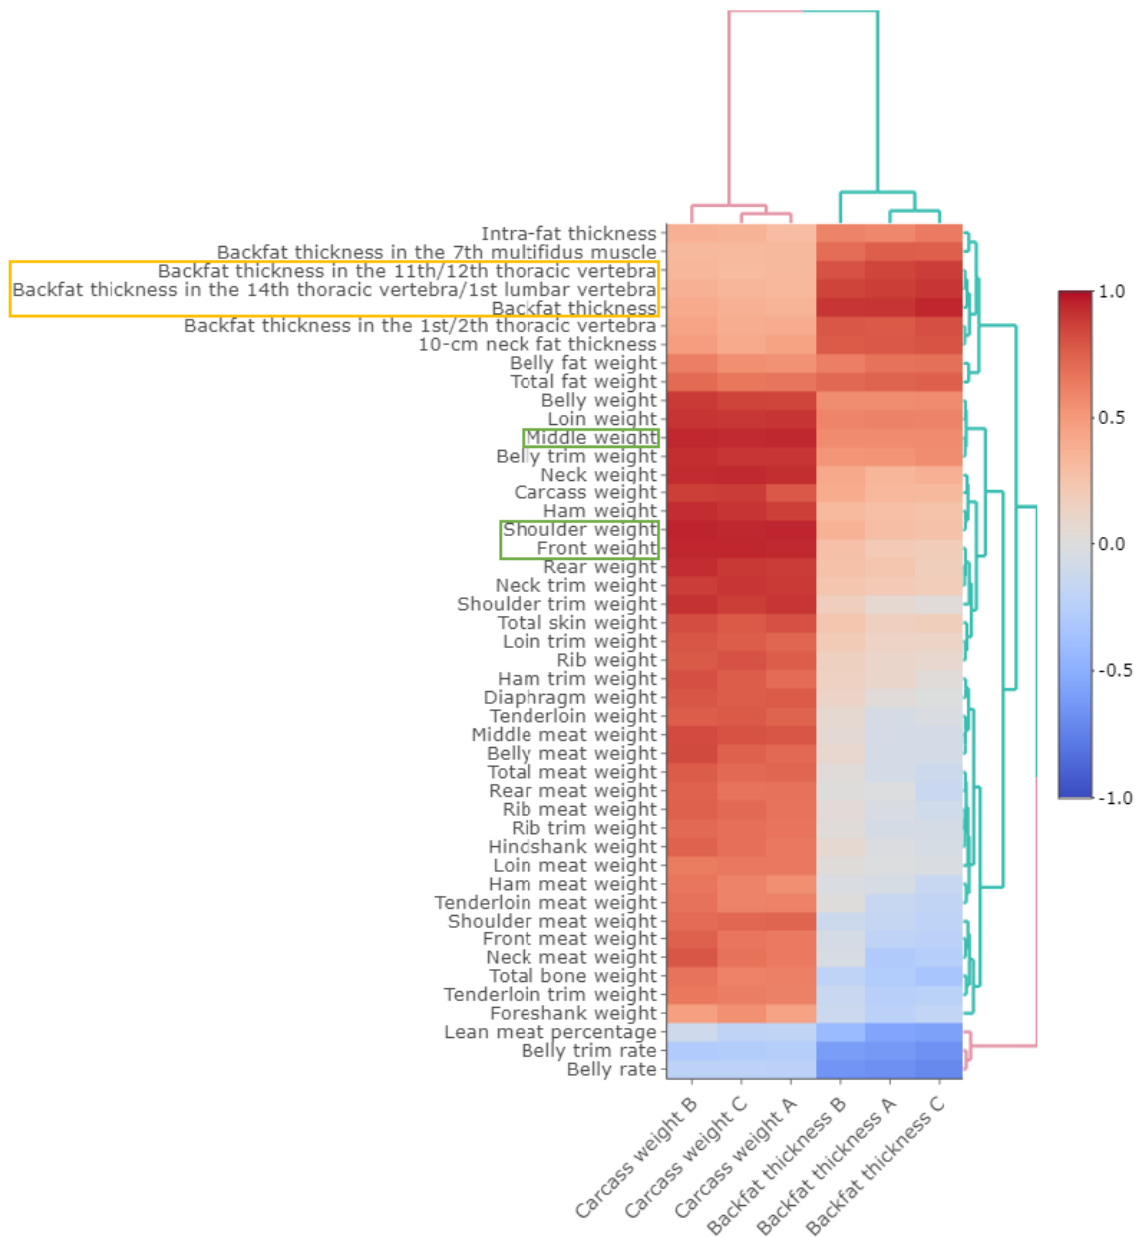

**Fig. 2. Heatmap showing the correlations between the two measured trait (backfat thickness and carcass weight) and the 46 estimated traits.** Colour scale bar from red to blue represents the degree of correlation coefficients. Yellow border indicates estimated traits that exhibiting the highest correlation coefficients with measured backfat thickness trait in all abattoirs. Green border indicates estimated traits that showing the highest correlation coefficients with measured carcass weight trait in all abattoirs. Data source for the plots can be found in **Supplementary table 2**.



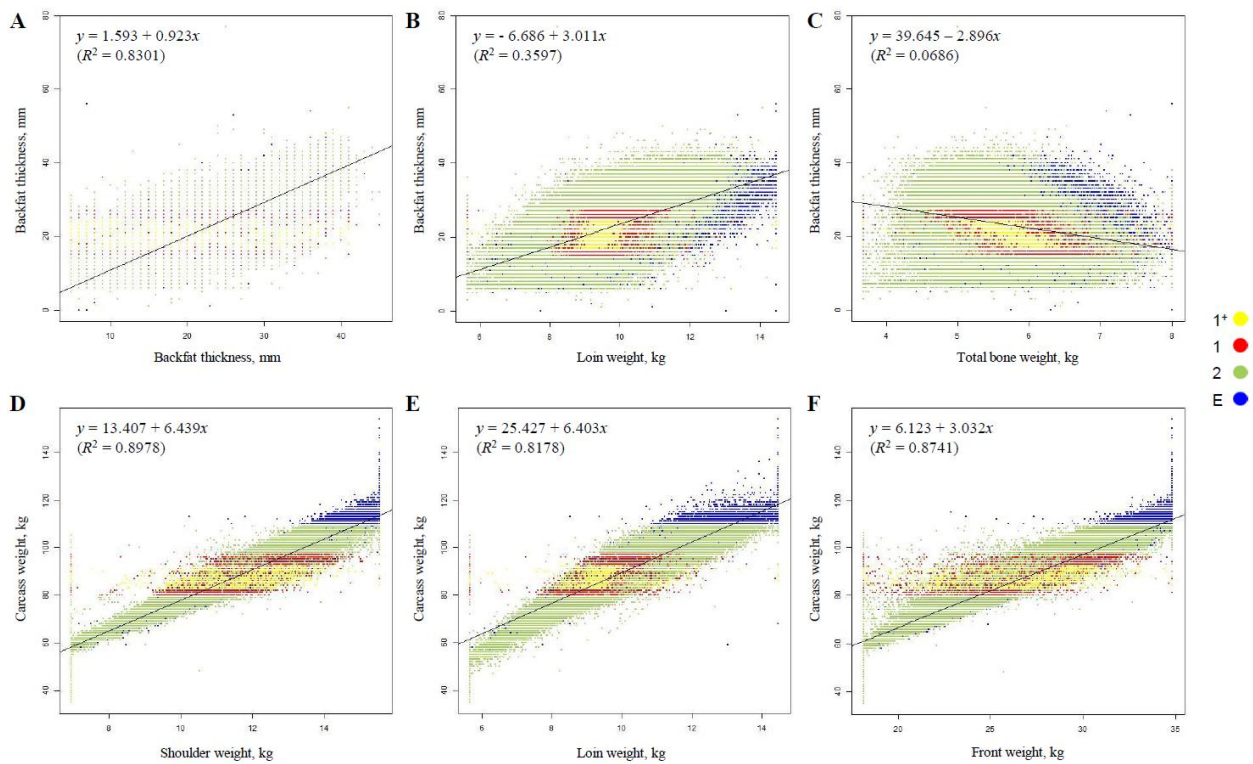

**Fig. 3. Linear regression plots of measured traits (backfat thickness and carcass weight) versus estimated top three traits.** The x-axis represents the estimated traits, whereas the y-axis represents the measured traits (A–C, backfat thickness; D–F, carcass weight). The colours in the linear regression plots represent scatter plots corresponding to four pork grades (1<sup>+</sup>, yellow; 1, red; 2, green; extra, blue).

308  
309

**Table 1.** The mean, standard deviation (SD), minimum (Min), and maximum (Max) values of measured and estimated traits of pig carcasses in all abattoirs

**Table 1.** The mean, standard deviation (SD), minimum (Min), and maximum (Max) values of measured and estimated traits of pig carcasses in all abattoirs

	Abattoir A ( <i>N</i> = 400,280)				Abattoir B ( <i>N</i> = 416,092)				Abattoir C ( <i>N</i> =252,647)			
	Mean	SD	Min	Max	Mean	SD	Min	Max	Mean	SD	Min	Max
<b>Measured traits</b>												
Backfat thickness, mm	23.282	4.894	0.000	56.000	22.844	4.971	3.000	55.000	22.602	4.790	0.000	77.000
Carcass weight, kg	90.195	6.568	37.000	154.000	86.777	7.268	35.000	140.000	88.419	6.151	38.000	130.000
<b>Estimated traits</b>												
Backfat thickness, mm	23.398	4.878	5.000	45.000	23.181	4.910	5.000	45.000	22.672	4.645	5.000	43.000
Backfat thickness in the 11th/12th thoracic vertebra, mm	24.775	5.018	5.000	48.000	23.343	5.085	5.000	48.000	23.234	4.946	5.000	48.000
Backfat thickness in the 14th thoracic vertebra/1st lumbar vertebra, mm	23.051	4.759	5.000	45.000	23.014	4.516	5.000	45.000	22.119	4.646	5.000	45.000
Backfat thickness in the 7th multifidus muscle, mm	17.814	4.951	3.000	44.000	18.011	4.686	3.000	45.000	16.283	4.621	3.000	41.000
Backfat thickness in the 1st/2th thoracic vertebra, mm	39.030	4.759	20.000	64.000	38.283	4.962	19.000	64.000	38.461	4.760	19.000	64.000
Carcass weight, kg	92.628	7.874	54.000	115.200	88.157	7.601	54.000	115.200	89.290	6.811	54.000	115.200
Front weight, kg	27.648	1.984	18.162	34.838	26.381	2.198	18.162	34.838	27.618	1.866	18.162	34.838
Middle weight, kg	33.836	3.117	21.206	47.104	32.502	3.308	21.206	47.104	32.650	2.805	21.206	47.104
Rear weight, kg	26.086	1.914	16.792	32.728	25.604	2.074	16.792	32.728	25.574	1.764	16.792	32.728

Rib weight, kg	3.969	0.350	2.090	5.476	3.845	0.382	2.090	5.476	4.034	0.314	2.090	5.476
Rib trim weight, kg	3.053	0.264	1.306	4.028	2.857	0.269	1.306	4.028	2.971	0.248	1.306	4.028
Rib meat weight, kg	2.270	0.208	0.993	3.155	2.164	0.210	0.993	3.155	2.243	0.207	0.993	3.155
Neck weight, kg	5.927	0.437	3.470	7.662	5.525	0.482	3.470	7.662	5.855	0.424	3.470	7.662
Neck trim weight, kg	4.669	0.365	2.823	5.975	4.423	0.400	2.823	5.975	4.605	0.336	2.823	5.975
Neck meat weight, kg	3.495	0.259	1.836	4.800	3.385	0.291	1.836	4.800	3.469	0.251	1.836	4.800
Shoulder weight, kg	11.897	0.954	6.959	15.557	11.421	1.094	6.959	15.557	11.651	0.890	6.959	15.557
Shoulder trim weight, kg	8.673	0.667	5.170	11.356	8.252	0.730	5.170	11.356	8.434	0.635	5.170	11.356
Shoulder meat weight, kg	6.357	0.545	3.566	9.082	6.186	0.582	3.566	9.082	6.373	0.510	3.566	9.082
Foreshank weight, kg	1.846	0.175	0.848	2.618	1.801	0.215	0.848	2.618	1.907	0.156	0.848	2.618
Front meat weight, kg	14.561	1.294	8.635	19.657	14.013	1.340	8.635	19.657	14.352	1.197	8.635	19.657
Tenderloin weight, kg	1.692	0.134	0.871	2.269	1.636	0.143	0.871	2.269	1.635	0.125	0.871	2.269
Tenderloin trim weight, kg	1.095	0.093	0.513	1.595	1.064	0.099	0.513	1.595	1.083	0.089	0.513	1.595
Tenderloin meat weight, kg	1.085	0.113	0.482	1.650	1.070	0.117	0.482	1.650	1.049	0.103	0.482	1.650
Belly weight, kg	16.893	1.728	9.566	23.688	15.927	1.798	9.566	23.688	15.926	1.558	9.566	23.688
Belly trim weight, kg	11.864	1.140	6.692	16.584	11.446	1.254	6.692	16.584	11.403	1.022	6.692	16.584
Belly meat weight, kg	7.879	0.654	4.104	10.564	7.546	0.712	4.104	10.564	7.627	0.602	4.104	10.564
Belly fat weight, kg	4.074	0.925	0.488	8.552	3.879	0.833	0.488	8.552	3.942	0.804	0.488	8.552
Belly rate, %	47.616	4.333	25.980	67.360	47.396	3.844	25.980	67.360	46.922	3.856	25.980	67.360
Belly trim rate, %	66.362	5.185	40.450	89.840	67.939	4.888	40.450	89.840	67.669	4.801	40.590	89.840
10-cm neck fat thickness, mm	19.944	4.436	4.000	43.000	20.233	4.212	4.000	43.000	20.166	4.019	4.000	43.000
Intra-fat thickness, mm	5.384	1.514	1.000	21.000	5.387	1.475	1.000	22.000	5.959	1.399	1.000	22.000
Diaphragm weight, kg	0.299	0.026	0.168	0.418	0.296	0.028	0.168	0.418	0.296	0.023	0.168	0.418
Loin weight, kg	10.086	0.961	5.649	14.479	9.663	1.002	5.649	14.479	9.750	0.877	5.649	14.479
Loin trim weight, kg	7.926	0.683	4.228	11.208	7.699	0.717	4.228	11.208	7.897	0.652	4.228	11.208

Loin meat weight, kg	7.085	0.719	3.070	10.274	6.719	0.715	3.070	10.274	6.741	0.620	3.070	10.274
Middle meat weight, kg	17.591	1.367	9.872	23.380	17.022	1.532	9.872	23.380	17.228	1.279	9.872	23.380
Ham weight, kg	19.728	1.514	11.561	25.419	19.427	1.686	11.561	25.419	19.178	1.391	11.561	25.419
Ham trim weight, kg	16.603	1.458	9.554	22.436	16.141	1.449	9.554	22.436	15.967	1.275	9.554	22.436
Ham meat weight, kg	14.477	1.374	8.032	20.596	14.144	1.297	8.032	20.596	13.872	1.212	8.032	20.596
Hindshank weight, kg	2.381	0.193	1.376	3.032	2.260	0.194	1.376	3.032	2.317	0.179	1.376	3.032
Rear meat weight, kg	16.634	1.383	9.285	23.311	16.063	1.414	9.285	23.311	16.138	1.262	9.285	23.311
Total skin weight, kg	6.308	0.352	4.321	8.115	6.127	0.402	4.321	8.115	6.113	0.343	4.321	8.115
Total fat weight, kg	24.105	4.153	6.742	45.354	22.713	4.085	6.742	45.354	22.937	3.887	6.742	45.354
Total bone weight, kg	5.854	0.445	3.689	8.003	5.667	0.436	3.689	8.003	5.783	0.422	3.689	8.003
Total meat weight, kg	48.299	3.865	29.298	64.838	47.492	4.604	29.298	64.838	47.812	3.806	29.298	64.838
Lean meat percentage, %	55.983	3.811	38.060	71.850	56.984	3.674	38.060	71.850	55.468	3.439	38.060	71.850

310

311

312 **Table 2.** The top three estimated traits that can predict measured traits according to the stepwise regression analysis  
 313

314

**Table 2.** The top three estimated traits that can predict measured traits according to the stepwise regression analysis

Step	Traits (Y =)	Abattoir	Sex	Season	Backfat thickness (X1 <sup>a</sup> )	Loin weight (X2 <sup>a</sup> )	Total bone weight (X3 <sup>a</sup> )	Shoulder weight (X1 <sup>b</sup> )	Loin weight (X2 <sup>b</sup> )	Front weight (X3 <sup>b</sup> )	Intercept	Standard Error	R <sup>2</sup>
1	Backfat thickness	-0.034	0.250	0.289	0.911	—	—	—	—	—	0.923	0.014	0.833
2		0.028	0.283	0.218	0.859	0.408	—	—	—	—	-1.953	0.022	0.837
3		0.033	0.276	0.223	0.781	0.829	-0.970	—	—	—	1.298	0.033	0.840
1	Carcass weight	-0.111	-0.025	-0.350	—	—	—	6.447	—	—	14.185	0.027	0.899
2		0.105	-0.236	0.102	—	—	—	4.166	3.029	—	10.181	0.016	0.967
3		-0.088	-0.156	0.090	—	—	—	2.419	2.759	1.003	6.185	0.013	0.980

<sup>a</sup> Partial regression coefficients for backfat thickness.

<sup>b</sup> Partial regression coefficients for carcass weight.

315

316

317 **Supplementary table 1.** Analysis of variance of fixed effects on measured traits of pig carcasses  
318 **Supplementary table 2.** Correlation between the two measured trait (backfat thickness and carcass weight) and the  
319 46 estimated traits of pig carcasses in all abattoirs  
320 **Supplementary table 3.** Stepwise regression analysis of the estimated traits versus measured backfat thickness  
321 **Supplementary table 4.** Stepwise regression analysis of the estimated traits versus measured carcass weight

ACCEPTED